



PIPES AND TUBES FOR EXHAUST SYSTEMS



EXHAUST TUBES AND STRAIGHT PIPES

Material - Stainless Steel, Mild Steel, or Aluminium

Can be machined and welded making it suitable for use in a whole range of applications

Thin wall material is suitable when weight is premium, or heat conduction is important.

Thin walled tube will still be strong but not as strong as regular walled tube.



PERFORATED PIPES

Material - Stainless Steel or Mild Steel

Length and OD - as per customer specifications


Deburred



ELBOWS


OD/OD

L mm	L mm	OD mm	OD Inch
200	50,0	2	
200	63,5	2 1/2	
200	194	76,2	3
201	180	88,9	3 1/2
236	200	101,6	4
152	101,6	4	
190	108,0	4 1/4	
200	200	114,3	4 1/2
254	114,3	4 1/2	
266	223	127,0	5

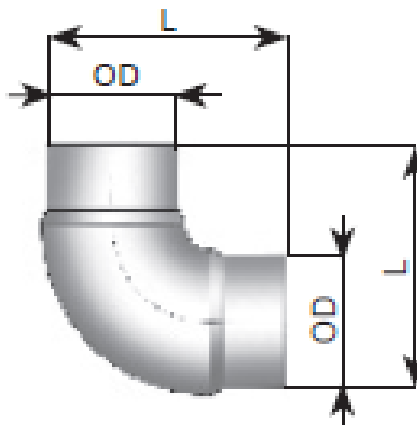


OD/OD (Cast)

OD mm	Inch	T mm	CLR
60,0	2 3/8	2,9	76
70,0	2 3/4	2,9	92
76,1	3	2,0	95
76,1	3	2,9	95
88,9	3 1/2	2,0	114
88,9	3 1/2	3,2	115
101,6	4	3,6	134
104,0	4	2,0	150
108,0	4 1/4	3,6	143
114,8	4 1/2	2,0	152
114,3	4 1/2	3,6	153
129,0	5 1/8	2,0	188
133,0	5 1/4	4,0	188



OD/OD (Welded/Thin Wall)

OD mm	Inch	T mm	CLR
50,8	2	1,5	50,8
63,5	2 1/2	1,5	50,8
63,5	2 1/2	1,5	63,0
76,2	3	1,5	63,5
76,2	3	1,5	76,2
88,9	3 1/2	1,5	76,0
88,9	3 1/2	1,5	88,9
101,6	4	1,5	85,0
101,6	4	1,5	101,6
108,0	4 1/4	1,5	76,0
114,3	4 1/2	1,5	96,8
114,3	4 1/2	1,5	114,3
127,0	5	1,5	100,0
127,0	5	1,5	127,0
130,0	5 1/8	1,5	100,0





Material thickness ranging from 1,5 to 2,0 mm.

OD/ID

L1 mm	L2 mm	OD mm	ID mm	OD Inch
200	200	50,0	51,3	2
200	200	63,5	64,0	2 1/2
200	200	76,1	77,0	3
200	210	89,0	89,5	3 1/2
201	203	88,9	91,0	3 1/2
200	210	101,6	102,5	4
243	243	101,6	102,1	4
200	210	108,0	108,5	4 1/4
200	210	110,0	111,0	4 1/3
207	207	114,3	114,5	4 1/2
255	255	127,0	128,0	5
225	223	127,0	128,0	5
265	265	127,0	128,0	5

ID/ID

L1 mm	L2 mm	ID mm	ID Inch
200	200	51,3	2
200	200	64,0	2 1/2
200	200	77,0	3
200	200	76,8	3
200	200	89,5	3 1/2
200	200	89,5	3 1/2
200	210	102,5	4
243	243	102,1	4
220	210	110,5	4 3/8
200	210	108,5	4 1/4
207	207	114,5	4 1/2
254	254	114,8	4 1/2
225	225	128,0	5

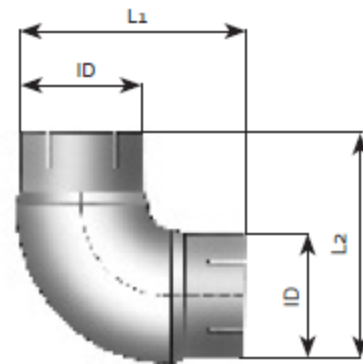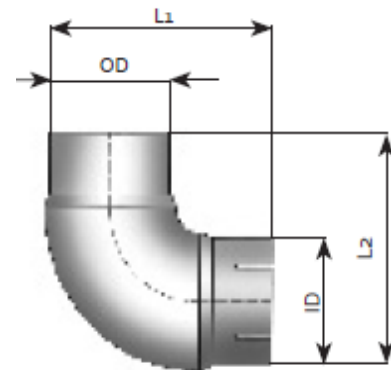


Material thickness ranging from 1,5 to 2,0 mm.

BENDS

90° (OD/OD)

L mm	OD mm	OD Inch	CLR
129	38,0	1 1/2	54,0
180	45,0	1 3/4	64,0
190	50,0	2	95,0
190	50,8	2	95,0
240	57,0	2 1/4	85,0
240	60,0	2 3/8	100,0
190	63,5	2 1/2	85,0
265	63,5	2 1/2	85,0
265	65,0	2 5/8	91,0
270	70,0	2 3/4	98,0
290	75,0	3	135,0
295	76,2	3	99,1
290	80,0	3 1/8	115,0
320	88,9	3 1/2	135,0
320	88,9	3 1/2	177,0
380	100,0	3 7/8	203,0
380	101,6	4	150,0
254	101,6	4	150,0
400	110,0	4 3/8	148,0
450	110,0	4 3/8	148,0
390	114,3	4 1/2	161,0
400	114,3	4 1/2	161,0
410	120,0	4 3/4	170,0
330	127,0	5	173,0
445	127,0	5	173,0
475	152,4	6	225,0


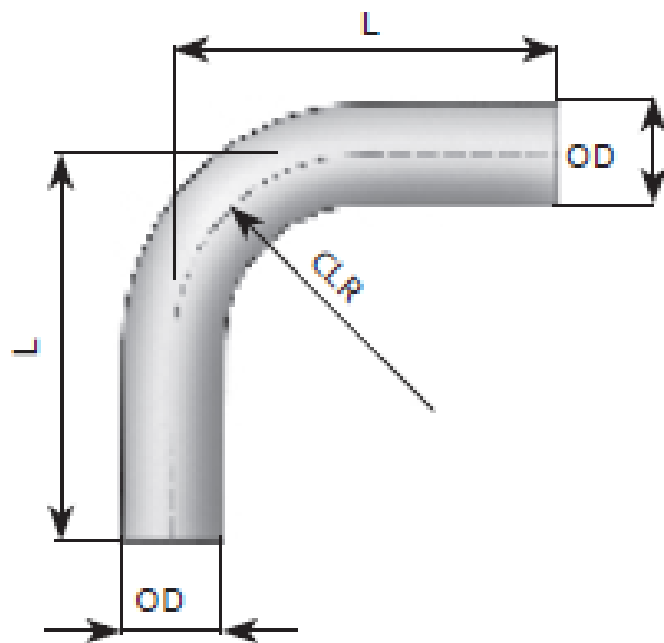


Material thickness ranging from 1,5 to 2,0 mm.

60° (OD/OD)

L mm	OD mm	OD Inch	CLR
------	-------	---------	-----

90	38,0	1 1/2	54,0
100	42,0	1 5/8	95,0
155	48,0	2	95,0
155	50,0	2	95,0
165	60,0	2 3/8	100,0
205	65,0	2 5/8	91,0
180	70,0	2 3/4	135,0
190	75,0	3	135,0
180	76,2	3	99,1
250	80,0	3 1/4	115,0
205	88,9	3 1/2	135,0
210	90,0	3 5/8	177,0
250	100,0	4	150,0
360	110,0	4 3/8	148,0
310	114,3	4 1/2	161,0
380	120,0	4 3/4	173,0
320	127,0	5	173,0

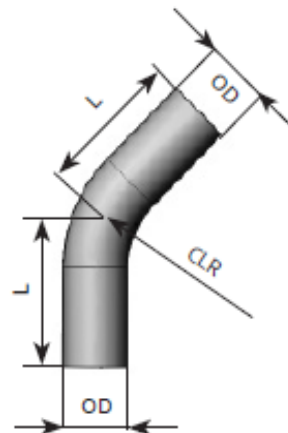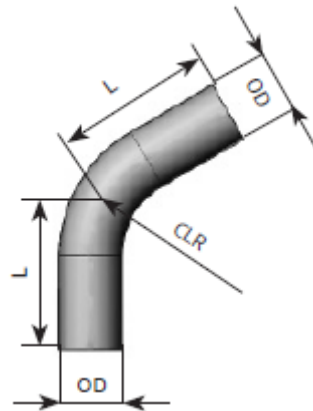

45° (OD/OD)

L mm	OD mm	OD Inch	CLR
------	-------	---------	-----


112,0	38,0	1 1/2	54,0
140,0	38,0	1 1/2	54,0
142,5	45,0	1 3/4	64,0
140,0	50,0	2	95,0
150,0	57,0	2 1/4	85,0
150,0	60,0	2 3/8	100,0
180,0	63,5	2 1/2	85,0
140,0	63,5	2 1/2	85,0
180,0	63,5	2 1/2	85,0
180,0	65,0	2 5/8	91,0
205,0	70,0	2 3/4	98,0
230,0	76,2	3	99,1
230,0	80,0	3 1/8	115,0
225,0	88,9	3 1/2	177,0
245,0	100,0	3 7/8	203,0
245,0	101,6	4	203,0
235,0	101,6	4	150,0
260,0	110,0	4 3/8	148,0
260,0	114,3	4 1/2	161,0
365,0	120,0	4 3/4	170,0
365,0	127,0	5	173,0
305,0	127,0	5	173,0
338,0	152,4	6	225,0

Material thickness ranging from 1,5 to 2,0 mm.

90° (OD/ID)


L mm	ID mm	OD mm	OD Inch	CLR
129	39,0	38,0	1 1/2	54,0
180	46,0	45,0	1 3/4	64,0
195	51,5	50,0	2	95,0
195	51,3	51,0	2	95,0
240	57,6	57,0	2 1/4	85,0
240	60,5	60,0	2 3/8	100,0
190	64,0	63,5	2 1/2	85,0
265	64,0	63,5	2 1/2	85,0
265	65,3	65,0	2 5/8	91,0
270	70,3	70,0	2 3/4	98,0
290	75,5	75,0	3	135,0
290	76,5	76,1	3	99,1
295	76,7	76,1	3	135,0
320	89,4	88,9	3 1/2	177,0
380	102,1	101,6	4	150,0
380	102,1	101,6	4	150,0
200	102,1	101,6	4	150,0
254	102,1	101,6	4	150,0
400	108,5	108,0	4 1/4	148,0
400	110,5	110,0	4 3/8	148,0
390	114,8	114,3	4 1/2	161,0
410	121,0	120,0	4 3/4	170,0
415	128,0	127,0	5	173,0
330	128,0	127,0	5	173,0
475	153,5	152,4	5	225,0

Material thickness ranging from 1,5 to 2,0 mm.

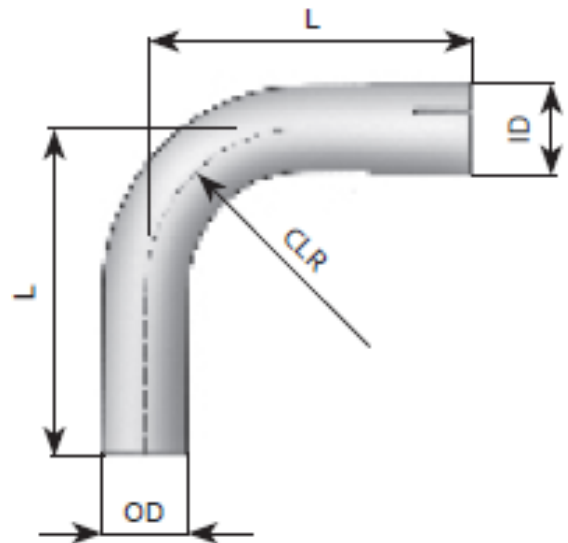

60° (OD/ID)


L mm	ID mm	OD mm	OD Inch	CLR
100,0	38,3	38,0	1 1/2	100
90,0	48,3	48,0	2	95
80,0	50,3	50,0	2	95
165,0	60,3	60,0	2 3/8	100
210,0	65,3	65,0	2 5/8	91
200,0	70,3	70,0	2 3/4	135
250,0	75,3	75,0	3	135
250,0	80,3	80,0	3 1/4	115
202,4	89,2	88,9	3 1/2	177
200,0	90,3	90,0	3 5/8	177
254,0	100,3	100,0	4	150
210,0	110,3	110,0	4 3/8	260
240,0	114,6	114,3	4 1/2	161
400,0	120,3	120,0	4 3/4	161
140,0	127,3	127,0	5	173

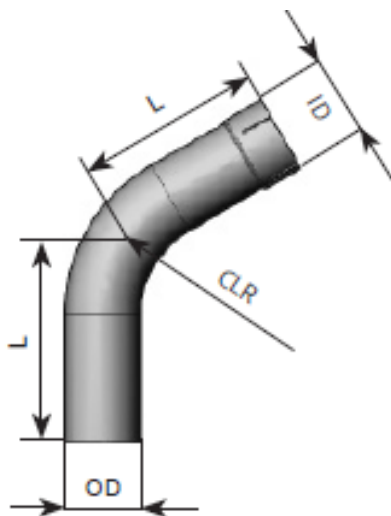

Material thickness ranging from 1,5 to 2,0 mm.

45° (OD/ID)


L mm	ID mm	OD mm	OD Inch	CLR
112,0	39,0	38,0	1 1/2	54,0
142,5	46,0	45,0	1 3/4	64,0
140,0	51,3	50,0	2	95,0
180,0	51,5	50,8	2	95,0
150,0	57,6	57,0	2 1/4	85,0
150,0	60,5	60,0	2	100,0
150,0	60,5	60,0	2 3/8	100,0
180,0	64,0	63,5	2 1/2	85,0
180,0	64,0	63,5	2 1/2	85,0
180,0	65,5	65,0	2 5/8	91,0
205,0	70,3	70,0	2 3/4	98,0
230,0	75,5	75,0	3	135,0
205,0	76,7	76,1	3	99,1
225,0	89,4	88,9	3 1/2	177,0
245,0	102,1	101,6	4	203,0
235,0	102,1	101,6	4	150,0
260,0	108,5	108,0	4 1/4	148,0
260,0	110,5	110,0	4 3/8	148,0
260,0	114,8	114,3	4 1/2	161,0
365,0	121,0	120,0	4 3/4	170,0
305,0	128,0	127,0	5	173,0
365,0	128,0	127,0	5	173,0
375,0	128,0	127,0	5	173,0
338,0	153,5	152,4	6	225,0



EXTENSION PIPES


ID mm	OD mm	OD Inch
-------	-------	---------

51,3	50,0	2
57,6	60,0	2 1/4
60,5	60,0	2 3/8
64,0	63,5	2 1/2
70,3	69,8	2 3/4
76,7	76,2	3
89,4	88,9	3 1/2
102,1	101,6	4
108,5	108,0	4 1/4
111,0	110,0	4 3/8
114,8	114,3	4 1/2
121,0	120,0	4 3/4
128,0	127,0	5

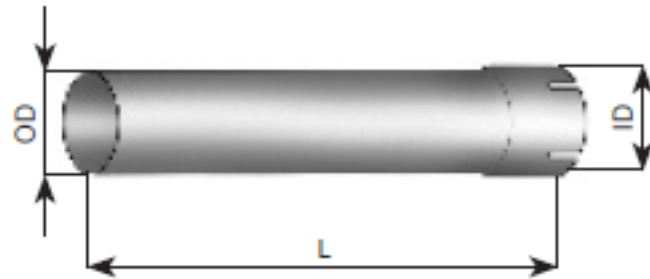

ID mm	OD mm	OD Inch
-------	-------	---------

64,0	63,5	2 1/2
76,7	76,2	3
89,9	89,4	3 1/2
102,1	101,6	4
114,8	114,3	4 1/2
128,0	127,0	5

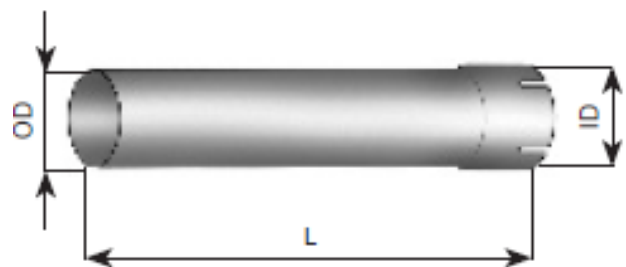


Material thickness 1,5 mm.


TAIL PIPES

Tail Pipes OD

OD mm	OD Inch	L mm
76,1	3	1000
89,0	3 1/2	1000
88,9	3 1/2	1220
88,9	3 1/2	1500
101,6	4	1000
101,6	4	1500
110,0	4 3/8	1000
114,3	4 1/2	940
114,0	4 1/2	1000
114,0	4 1/2	1450
114,3	4 1/2	1500
127,0	5	1000
127,0	5	1500
127,0	5	2000



OD mm	OD Inch	L mm
114,3	4 1/2	313



Tail Pipes ID


ID mm	ID Inch	L mm
50,5	2	260
60,5	2 3/8	305
65,5	2 5/8	1500
70,5	2 3/4	300
75,5	3	365
76,2	3	500
76,0	3	1130
76,2	3	1500
77,0	3	2500
80,5	3 1/8	340
90,2	3 1/2	500
89,5	3 1/2	2500
89,5	3 1/2	1500
90,5	3 1/2	360
101,0	3 7/8	375
102,0	4	500
102,0	4	1500
102,1	4	2500
111,0	4 3/8	535
111,0	4 3/8	1500
114,3	4 1/2	1500
115,0	4 1/2	535
115,0	4 1/2	500
115,0	4 1/2	1045
115,0	4 1/2	2500
121,0	4 3/4	515
121,0	4 3/4	1500
128,0	5	500
128,0	5	1500



ADAPTORS AND CONNECTORS


OD mm	OD Inch
-------	---------

76,0	3
89,0	3 1/2
114,3	4 1/2
127,0	5




OD mm	OD Inch
-------	---------

76,0	3
89,0	3 1/2
101,6	4




OD mm	OD Inch
-------	---------

89,0	3 1/2
102,0	4




ID/OD mm	ID/OD Inch
----------	------------

111,5/110,0	4 3/8-4 1/8
-------------	-------------





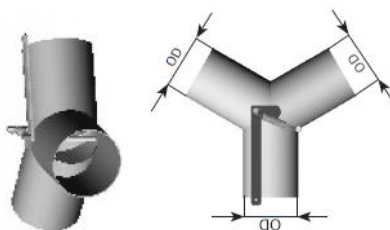


OD mm	OD Inch	Design
-------	---------	--------

114,3	4 1/2	T
-------	-------	---



EXHAUST TRIMS

<p>Stainless steel exhaust tailpipe trim</p>	
<p>stainless steel exhaust tailpipe trim 60mm diameter x 150mm length.</p>	
<p>universal stainless steel exhaust tailpipe trim (95mm x 65mm x 120mm)</p>	
<p>universal stainless steel exhaust tailpipe trim 60mm diameter x 150mm length</p>	

<p>universal stainless steel exhaust tailpipe trim (50mm)</p>	
<p>universal stainless steel exhaust tailpipe trim (60mm)</p>	
<p>universal stainless steel exhaust tailpipe trim 80mm diameter x 150mm length</p>	
<p>universal stainless steel exhaust tailpipe trim 70mm diameter x 120mm length</p>	

<p>universal stainless steel exhaust tailpipe trim 80mm diameter x 120mm length</p>	
<p>universal stainless steel exhaust tailpipe trim 90mm diameter x 120mm length</p>	
<p>universal stainless steel exhaust tailpipe trim (95mm x 65mm)</p>	

REDUCERS



CONTACT INFORMATION

Invicta India Pvt. Ltd.
N-258/B GK-1
New Delhi
India

REX Consolidated
80 DLF Industrial Area Phase 1
Faridabad Haryana-121003
India

© Copyright 2020 Invicta India Pvt. Ltd.

All information and data stated in this Product Range document has been compiled with utmost care. Nevertheless, Invicta accepts no liability for any errors, omissions or other inaccuracies contained herein. Subject to change without notice. Reprinting or reproduction, in whole or in part, including of photographs, illustrations or graphics, is not permitted without the prior written consent of Invicta India Pvt. Ltd.. We reserve all rights in connection with this document. Any similarity or resemblance is unintended and is merely a coincidence.

The vehicle applications cited in this Product Range document may possibly be valid only up to the date printed on the last page of the document. All references made in this Product Range document to the item numbers of vehicle manufacturers and/or competitors are provided for the purpose of comparison only. Such information is not allowed to be used in invoices issued to vehicle owners.

For enquiries, please email us : rahul@invictaindia.com